



ZUMALIGHTING

Project _____

Type _____

Qty _____

Company _____

Part # _____

PA Round Aluminum Pole

Overview

Specifications Shaft Designed for superior structural strength and the highest level of corrosion resistance, these shafts are fabricated from high grade aluminum to perform in even the most demanding applications. Overall pole height is measured from bottom of base plate to the pole top. Note: tenon height not included in specified pole height. Handhole / Grounding Reinforced hand hole is furnished with cover. All fasteners are stainless steel. All poles include internal ground lug / nut welded to the pole shaft within handhole. Baseplate Pole shaft is welded to a baseplate w/ 4-bolt pattern – baseplate size and bolt circle vary based on pole size. All exterior hardware is corrosion resistant stainless steel, supplied in its natural stainless finish. Color matched hardware is available on request for select finishes; consult factory.

Mounting

Specify drill pattern & configuration or select tenon option. Anchorbolts Anchorbolts are equipped with (2) galvanized nuts and (2) washers per bolt, size and length vary based on selected pole size. All anchorbolts are hot dip galvanized carbon steel with minimum yield strength of 50,000 psi. Pole Top Cap Standard drill-mount poles include black removable top cap. Powder Coat Finish Thermoset polyester powder coats undergo sandblast treatment to ensure optimal adhesion and surface integrity. Each coating is meticulously applied to achieve a uniform thickness of 2-4 mils. Galvanized and marine grade finish can be specified. Base Cover Poles are equipped with easy assembly 2-Piece square base cover to conceal and protect base cover and anchorbolts. For more architectural base cover options, contact a Zuma representative.

Finish

Outdoor polyester powder coat, available in our Zuma standard finishes with a four-step pretreat process to ensure optimal adhesion and surface integrity. All standard finishes are provided in a fine texture with a matte sheen; additional textures and sheens are available upon request. Also available in custom RAL and in marine grade finish (MGF), specify.

Certificates & Warranty

- Designed to comply with UL 8750
- Suitable for Wet Locations
- 5-Year Warranty

Technical

- Operating Temperature: -40°F to 95°F (-40°C to 35°C)





ZUMALIGHTING

Project _____ Type _____ Qty _____

Company _____ Part # _____

PA Round Aluminum Pole

Example Code: PA-10-4R-120-BC912-XM-BZ8-GFIP

Item	Height	Pole-Size	Wall-Thickness	Bolt-Circle	Mounting	Finish	Options
PA PA Round Aluminum Pole	10 ft	4R 4" Round	120 .120 in	BC912 9 1/2" dia.	XM No drilling, no tenon	BZ8 Zuma Bronze	GFIP provision only
	12 ft	5R 5" Round	188 .188 in	BC1112 11 1/2" dia.	S1 Single Drilling	BK GT Black	MGF Marine Grade Finish
	15 ft	6R 6" Round	250 .25 in	CBP Custom Bolt Pattern	D180 Double 180° Drilling	SL Iridium Silver	EYE Eyebolt (specify location)
	20 ft				D90 Double 90° Drilling	WH Alpine White	BAA Buy American Act Compliant
	25 ft				T90 Triple Drilling	GR2 Midnight Gray	BABA Build America, Buy America Act Compliant
	30 ft				Q90 Quad Drilling	GRN Moss Green	LAB Less Anchor Bolts
CH Custom Height					TN3 3" OD × 4" length	CCxxx¹ Custom Color	CSTP Custom Provision
					TN238 2-3/8" OD × 4" length	WGF Woodgrain Finish	VD Vibration Dampener
					TNC Custom Tenon		

1 Custom colors: Available in smooth and textured finishes. Also available in RAL and Sherwin Williams colors, consult factory.






ZUMALIGHTING

Project _____ Type _____ Qty _____

Company _____ Part # _____

PA Round Aluminum Pole

Dimensions

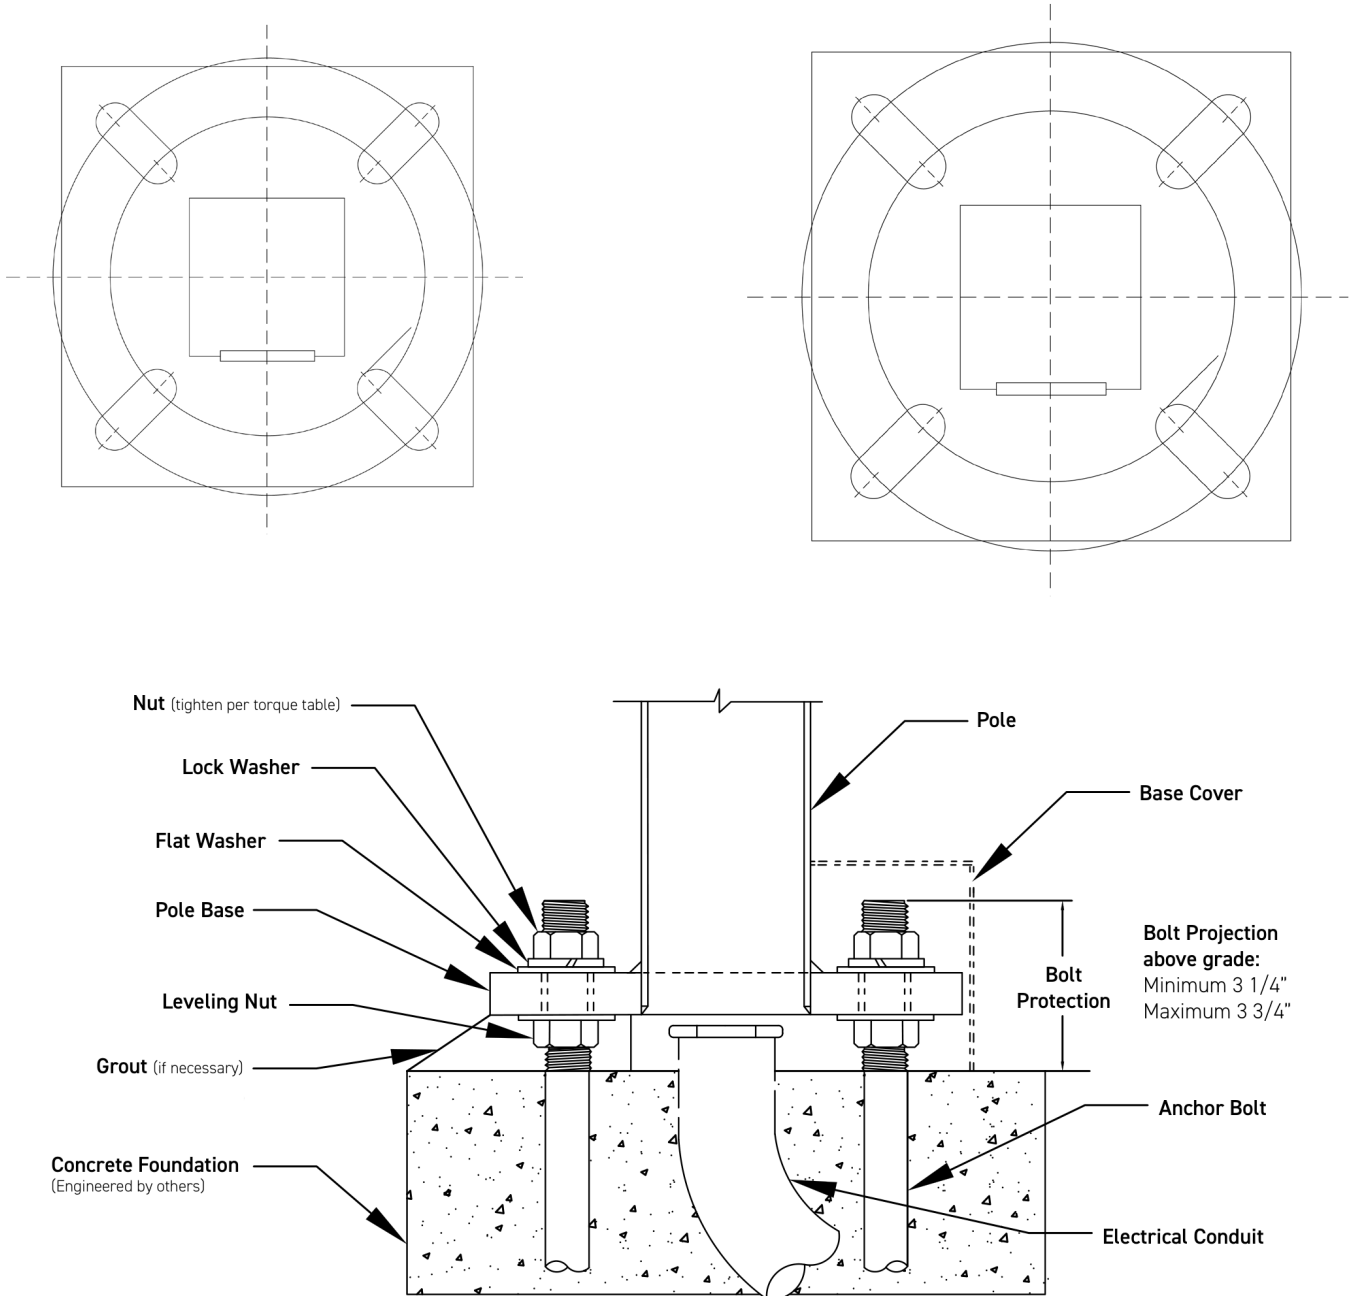

ADDITIONAL NOTES

