ZUMALIGHTING

Project _____ Type _____ Qty _____

Company _____ Part # _____

PAT Round Aluminum Tapered Pole

Overview

Specifications Shaft Round aluminum shaft fabricated from high grade mechanical tube with a minimum yield strength of 46,000 psi, conforming to ASTM A500 Grade B specifications. Overall pole height is measured from bottom of base plate to the pole top. Note: tenon height not included in specified pole height. Handhole / Grounding Reinforced hand hole is furnished with cover. All fasteners are stainless steel. All poles include internal ground lug / nut welded to the pole shaft within handhole. Baseplate Pole shaft is welded to a baseplate w/ 4-bolt pattern – baseplate size and bolt circle vary based on pole size. All exterior hardware is corrosion resistant stainless steel, supplied in its natural stainless finish. Color matched hardware is available on request for select finishes; consult factory.

MARINE GRADE FINISH

BAA / BABA OPTIONAL



Mounting

Specify drill pattern & configuration or select tenon option. Anchorbolts Anchorbolts are equipped with (2) galvanized nuts and (2) washers per bolt, size and length vary based on selected pole size. All anchorbolts are hot dip galvanized carbon steel with minimum yield strength of 50,000 psi. Pole Top Cap Standard drill-mount poles include black removable top cap. Powder Coat Finish Thermoset polyester powder coats undergo sandblast treatment to ensure optimal adhesion and surface integrity. Each coating is meticulously applied to achieve a uniform thickness of 2-4 mils. Galvanized and marine grade finish can be specified. Base Cover Poles are equipped with easy assembly 2-Piece square base cover to conceal and protect base cover and anchorbolts. For more architectural base cover options, contact a Zuma representative.

Finish

Outdoor polyester powder coat, available in our Zuma standard finishes with a four-step pretreat process to ensure optimal adhesion and surface integrity. All standard finishes are provided in a fine texture with a matte sheen; additional textures and sheens are available upon request. Also available in custom RAL and in marine grade finish (MGF), specify.

Certificates & Warranty

- Designed to comply with UL 8750
- Suitable for Wet Locations
- 5-Year Warranty

Technical

- Operating Temperature: -40°F to 95°F (-40°C to 35°C)

Product specifications and design subject to change, at any time, without notice.

Please consult Zuma Lighting for the most current information.

Zuma Lighting LLC | 3850 S. Santa Fe Ave. Los Angeles, CA 90058 | www.zumalighting.com | (310) 975-3126

ZUMALIGHTING

Project _____ Type _____ Qty _____

Company _____ Part # _____

PAT Round Aluminum Tapered Pole

Example Code: PAT-10-R-120-4-3-BCXX-XM-BZ8-GFIP

Item	Height	Pole-Type	Wall-Thickness	Butt-Diameter	Top-Diameter	Bolt-Circle	Mounting	Finish	Options
PAT PAT Round Aluminum Tapered Pole	**10** ft	**R** Round	**120** .120 in	**4** " OD	**3** " OD	**BCXX** Contact sales for bolt circle details	**XM** No drilling, no tenon	**BZ8** Zuma Bronze	**GFIP** provision only
	12 ft		**156** .156 in	**5** " OD	**4** " OD		**S1** Single Drilling	**BK** GT Black	**MGF** Marine Grade Finish
	15 ft		**188** .188 in	**6** " OD			**D180** Double 180° Drilling	**SL** Iridium Silver	**EYE** Eyebolt (specify location)
	20 ft		**250** .25 in	**7** " OD			**D90** Double 90° Drilling	**WH** Alpine White	**BAA** Buy American Act Compliant
	25 ft		**312** .312 in	**8** " OD			**T90** Triple Drilling	**GR2** Midnight Gray	**BABA** Build America, Buy America Act Compliant
	30 ft			**9** " OD			**Q90** Quad Drilling	**GRN** Moss Green	**LAB** Less Anchor Bolts
	35 ft			**10** " OD			**TN3** 3" OD × 4" length	**CCxxx**[1] Custom Color	**CSTP** Custom Provision
	40 ft						**TN238** 2-3/8" OD × 4" length	**WGF** Woodgrain Finish	**VD** Vibration Dampener
	CH Custom Height						**TNC** Custom Tenon		

1 Custom colors: Available in smooth and textured finishes. Also available in RAL and Sherwin Williams colors, consult factory.

Product specifications and design subject to change, at any time, without notice.

Please consult Zuma Lighting for the most current information.

Zuma Lighting LLC | 3850 S. Santa Fe Ave. Los Angeles, CA 90058 | www.zumalighting.com | (310) 975-3126


ZUMALIGHTING


Project _____ Type _____ Qty _____

Company _____ Part # _____

PAT Round Aluminum Tapered Pole

Dimensions

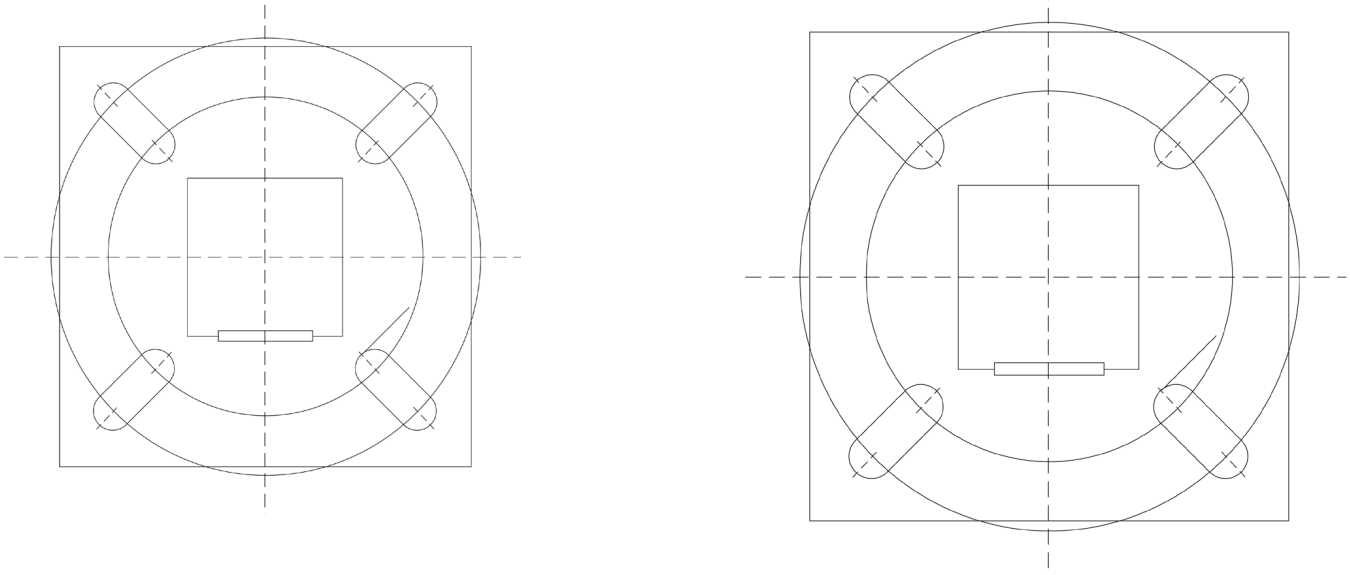

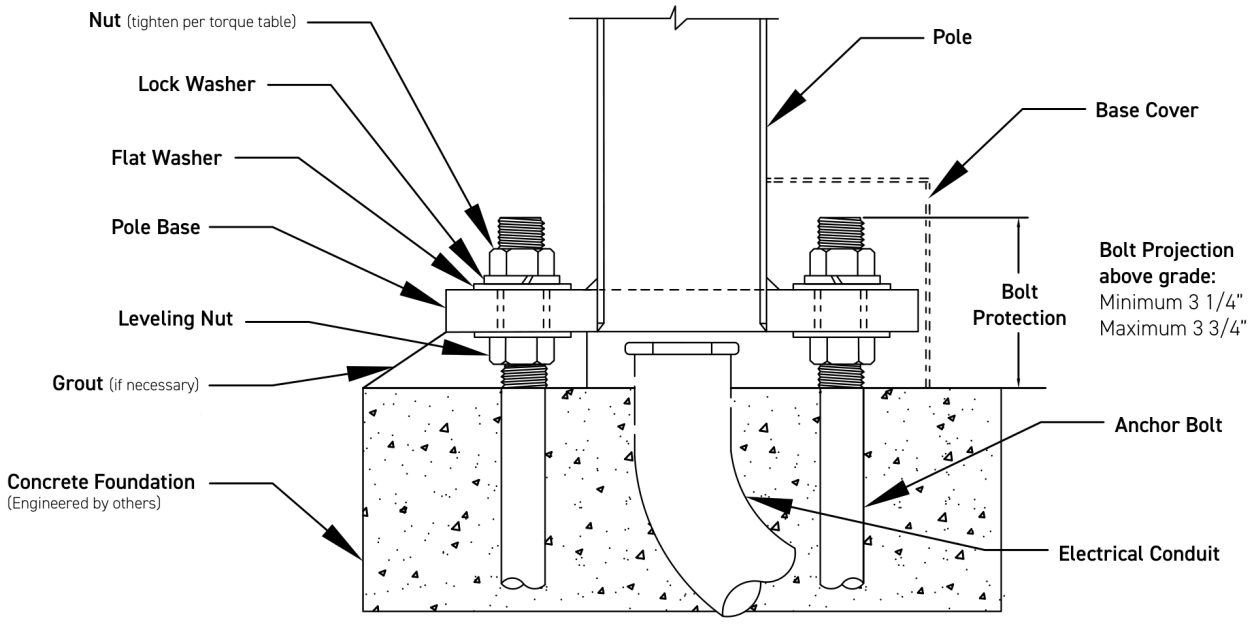

ITIONAL NOTES

Product specifications and design subject to change, at any time, without notice.

Please consult Zuma Lighting for the most current information.