

Campbell

Construction

The Campbell architectural fixture features a cast and extruded aluminum housing with a durable spun aluminum shade, finished in a weather-resistant polyester powder coat.

Electrical

Watts : 20w through 160w, Custom watts available, consult factory.

Voltage

120v through 277v and High voltage 347V - 480V.

LED

High performance LED CRI: 80. Color temperature ranges from CCT: 2700K - 5000K.

Optic

Type II (T2), Type III (T3), Type IV (T4) and Type V (T5)

Lens

No Diffusion Lens (NL), Frosted Lens (FL), Opal White Lens (OL), or Clear Lens (CL)

Mounting

Designed to fit over a 2-3/8" O.D. Tenon (SF238) or 3" O.D. Tenon (SF300).

Finish

Outdoor polyester powder coat, available in our Zuma standard finishes with a four-step pretreat process to ensure optimal adhesion and surface integrity. Also available in custom RAL and in marine grade finish (MGF), specify.

Controls

- Dimming. 0-10v dimming (D) available.
- Photocell: Mounts to fixture top (for SAM1) or side (for TAM1) mounting.
- Motion Sensor (M)

Options

- Campbell can be made to "Buy American Compliant" (BAA)¹ and "Build America, Buy America Act Compliant" (BABA)¹ (includes BAA)
- Sky Night Friendly (SKY)
- 180° Houseside Shield (HSS)
- 180° Houseside Shield Optics (HSSOP)
- Surge Protection (S)
- Marine grade finish (MGF) available in standard and custom colors, consult factory.

¹ Must specify at time of ordering in order to ensure product is manufactured to meet all required compliances.



Certificates & Warranty

- Designed to comply with UL 8750
- Suitable for Wet Locations
- 5-Year Warranty

Technical

- Operating Temperature: -40°F to 95°F (-40°C to 35°C)





ZUMALIGHTING

Campbell

Example Code: CBL-17-20W-U-3K-T3-NL-SF238-WH-D-PC-M-SKY-S-MGF

Project _____ Type _____ Qty _____

Company _____ Part # _____

Item	Sizes	Wattage	Volts	Color Temp	Optics	Lens	Mounting	Finish	Controls	Options
CBL Campbell	17 17"	20W	U 120v-277v	27K 2700K	T2 Type II	NL ¹ No Diffusion Lens	SF238 Fits over 2-3/8" OD Tenon	BZ8 Zuma Bronze	D Dimming 0-10v	BAA ² Buy American Act Compliant
	22 22"	30W	HV 347v-480v	3K 3000K	T3 Type III	FL ³ Frosted Lens	SF300 Fits over 3" OD Tenon	BK GT Black	PC Photocell	BABA ³ Build America, Buy America Act Compliant
	26 26"	40W		35K 3500K	T3 Type IV	OL ⁴ Opal White Lens		SL Iridium Silver	M Motion Sensor	SKY Sky Night Friendly
		50W		4K 4000K	T5 Type V	CL ⁴ Clear Lens		WH Alpine White		HSS 180° Houseside Shield
		60W		45K 4500K				GRY Granite Gray		HSSOP 180° Houseside Shield (optics)
		80W		5K 5000K				GRN Moss Green		S Surge Protection
		100W						CCxx ⁴ Custom Color		MGF Marine Grade Finish
		120W								
		120W								
		140W								

- 1 Fixtures specified without diffusion lens are equipped with exposed optical lens. For use with Type II through Type V (T2, T3, T4, T5) optics.
2 Consult our sales team for detailed information on compliance with domestic manufacturing regulations.
3 For use with Type V (T5) optics only. Consult factory for Anti-Glare Frosted Diffusion Lens with other Optic Types - Type II through Type IV (T2, T3, T4).
4 Custom colors: Available in smooth and textured finishes. Also available in RAL and Sherwin Williams colors, consult factory.






Qty _____

Part # _____

Campbell

Dimensions

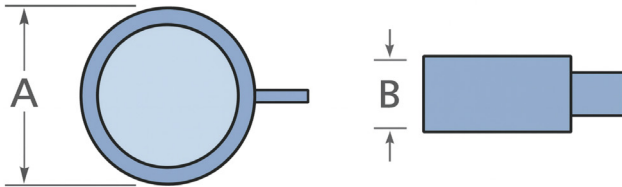

	Size = 17	Size = 22	Size = 26
A	17"	22"	26"
B	8"	13"	13.5"
EPA	1.1	1.6	2.0