

San Tropez

Construction

The San Tropez architectural fixture is fabricated from heavy duty cast aluminum and extruded aluminum base with an outdoor polyester powder coat finish. Comes with a 3 decorative arms (3DA, std) and optional 2 and 4 decorative arms (2DA, 4DA). Also available are optional anti-glare frosted lens. The San Tropez is constructed to meet a variety of classic architectural venues. Designed to install directly on poles or pole tenons and architectural arms that mount on poles or walls. Also available as a wall mount, consult factory.

Electrical Components

- Watts : 20w through 160w, Custom watts available, consult factory.
- Voltage: 120v through 277v and High voltage 347V - 480V.

LED

High performance LED CRI: 80. Color temperature ranges from CCT: 2700K - 5000K. Also available in Amber +560nm (AMBR).

Optic

Type II (T2), Type III (T3), Type IV (T4), and Type V (T5)

Lens

- No Lens (NL): for use with Type II through IV (T2, T3, T4, T5) optics.
- Anti-Glare Lens: Anti-Glare Frosted (FDL), Anti-Glare Opal Diffusion (ODL), Anti-Glare Convex Frosted Diffusion (FDLC) for use with Type IV (T5) optics only.

Mounting

- Designed to fit over a 2-3/8" O.D. x 4" L Tenon (SF23804), 3" O.D. x 4" L Tenon (SF304), 3.5" O.D. x 04" L Tenon (SF3504), 4.0" O.D. x 04" L Tenon (or 4.0" O.D. x 4" Long straight pole (SF404).
- Available for use with a custom slip fitter (CSFxxx, e.g.: Specify: CSF3095 = Fits over a 3" O.D. x 9.50" L Tenon, CSF310 = Fits over a 3" O.D. x 10" L Tenon, etc.).
- Wall Mount Version (WM): Wall Mount (WM) version mounts on a wall over a 4" Octagonal through 5" square J-box. Consult factory for specifications.

Arms

- Standard with three (3) decorative arms at 120° apart (3DA).
- Also available with two (2) decorative arm at 180° apart (2DA) or with four (4) decorative arm at 90° apart (4DA)

Finish

Outdoor polyester powder coat, available in our Zuma standard finishes with a four-step pretreat process to ensure optimal adhesion and surface integrity. Also available in custom RAL and in marine grade finish (MGF), specify.

Controls

- Dimming. 0-10v dimming (D) available.
- Photocell: Mounts to top of fixture (SAM) or side (TAM)



Options

- San Tropez can be made to "Buy American Compliant" (BAA) and "Build America, Buy America Act Compliant" (BABA) (includes BAA)
- SKY = Sky Night Friendly: Downward light only.
- HSS = 180° House Side Shield.
- House Side Shield - Optics (HSSOP): A 180° House Side Shield on the Optic Lens.
- SP = Surge Protection: To be field installed in the bottom of the pole.
- Super Durable Marine Grade Finish (MGF) available in standard and custom colors, consult factory.
- FN = Finial
- CS = Concave Scrolls

Certificates & Warranty

- Designed to comply with UL 8750
- Suitable for Wet Locations
- 5-Year Warranty

Technical

- Operating Temperature: -40°F to 95°F (-40°C to 35°C)





ZUMALIGHTING

Project _____ Type _____ Qty _____

Company _____ Part # _____

San Tropez

Example Code: STR-60W-U-4K-T4-NL-SF304-BZ8-BABA-HHSOP-MGF


Item	Wattage Lumens ¹	Volts	Color Temp	Optics	Lens	Mounting	Finish	Controls	Arms	Options
STR San Tropez	20W 1960-2260	U 120v-277v	27K 2700K	T2 Type II	NL² No Diffusion Lens	SF238 Fits over 2-3/8" OD tenon	BZ8 Zuma Bronze	D Dimming 0-10v	3DA 3 Decorative Arms, 120° Apart (Std)	BAA³ Buy American Act Compliant
	30W 2940-3390	HV 347v-480v	3K 3000K	T3 Type III	FDL⁴ Anti-Glare Frosted Diffusion	SF300 Fits over 3" OD tenon	BK GT Black	PC Photocell	2DA 2 Decorative Arms, 180° Apart*	BABA³ Build America, Buy America Act Compliant (Includes BAA)
	40W 2940-4520		35K 3500K	T4 Type IV	ODL⁴ Anti-Glare Opal Diffusion	CSFxxx⁵ Custom Slipfitter	SL Iridium Silver		4DA 4 Decorative Arms, 90° Apart	SKY Sky Night Friendly
	60W 5880-6780		4K 4000K	T5 Type V	FDLC⁴ Anti-Glare Convex Frosted Diffusion	WM⁶ Wall Mount	WH Alpine White			HSS 180° Houseside Shield
	80W 7840-9040		45K 4500K		ODLC⁴ Anti-Glare Convex Opal Diffusion		GRY Granite Gray			HSSOP 180° Houseside Shield (Optics)
	90W 8820-10170		5K 5000K				GRN Moss Green			MGF Marine Grade Finish
	120W 11760-13560						CC⁷ Custom Color			SP Surge Protection
	150W 14700-16950									FN Finial
	160W 15680-18080									CS Concave Scrolls

- 1 Lumen values may vary based on factors such as distribution type and color temperature.
2 Fixtures specified without diffusion lens are equipped with exposed optical lens. For use with Type II through Type V (T2, T3, T4, T5) optics.
3 Consult our sales team for detailed information on compliance with domestic manufacturing regulations.
4 For use with Type V (T5) optics only. Consult factory for Anti-Glare Frosted Diffusion Lens with other Optic Types - Type II through Type IV (T2, T3, T4).
5 Custom Slipfitter (CSFxxx. e.g.: CSF3095 = 3" O.D. x 9.50" L Tenon, etc.). Consult Factory
6 Wall mount fixtures (WM) mounts on a wall over a 4" or 5" J-box. Consult factory for specifications.
7 Custom colors: Available in smooth and textured finishes. Also available in RAL and Sherwin Williams colors, consult factory.




San Tropez



Dimensions

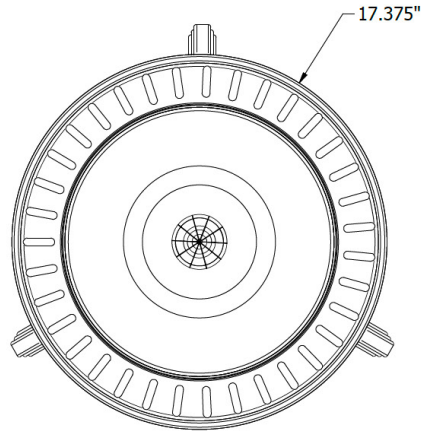

Convex Scrolls (Standard)

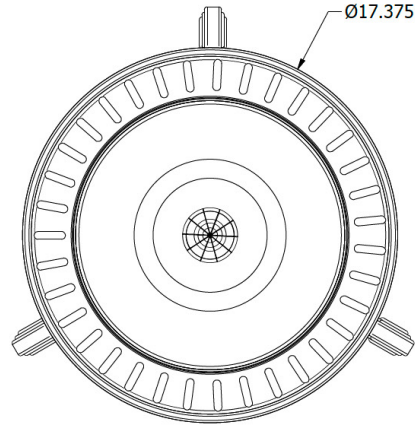

Concave Scrolls (Additional Option)

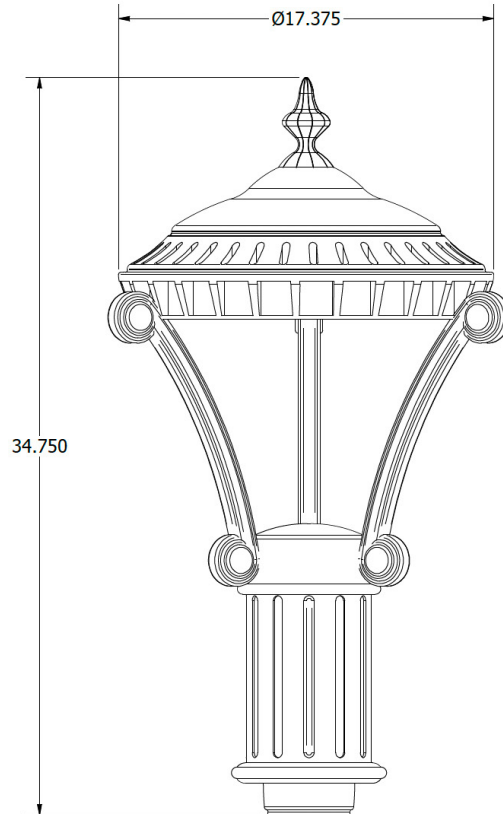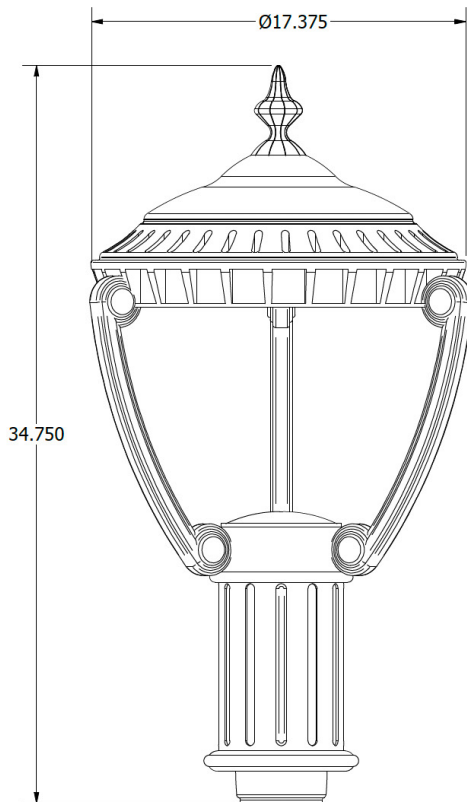



San Tropez

Wall Mount Dimensions

- Decorative Arm and Wall Bracket ordered separately
- Contact Zuma for additional arm styles

San Tropez shown below with AT36 Scrolled Wall Mount Arm

