



ZUMALIGHTING
QUALITY OUTDOOR SOLUTIONS



MODEL
FLEUR

TYPE
LED AREA

SERIES
SITE & AREA


ZUMA LIGHTING LLC
325 N LARCHMONT BLVD STE 406, LOS ANGELES, CA 90004
INFO@ZUMALIGHTING.COM • (310) 975-3126 • ZUMALIGHTING.COM

ORDERING INFORMATION

Model FLEUR

Type LED AREA

Series SITE & AREA

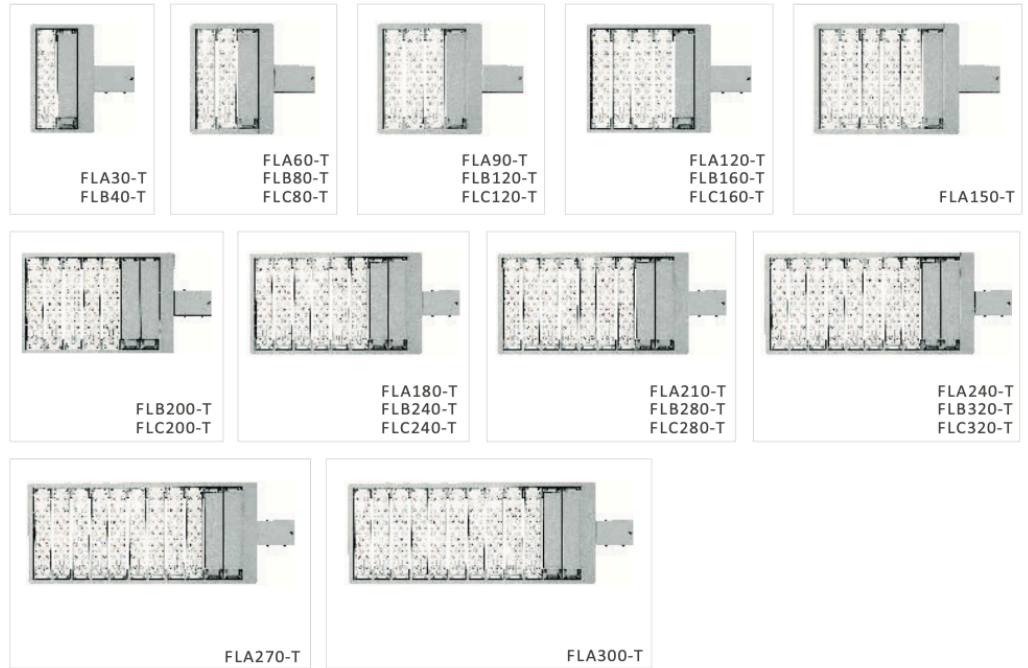

ORDERING INFORMATION

Example : FLA30-T-T5S-50K-BK-00

| MODEL | | | MOUNTING | OPTIC LENS | CCT (ANSI) | OPTIONAL COLOR | LIGHTING CONTROL | ACCESSORY INFO |
|---------------------------------------|---------------------------------------|-------------------------|--------------------------------|------------|------------|----------------|---------------------------------|------------------------------|
| 120-277VAC or 220-240VAC (30W/module) | 120-277VAC or 220-240VAC (40W/module) | 347-480VAC (40W/module) | | | | | | |
| FLA30 | FLB40 | FLC80 | T = Bolt-On L = Slip-Fitter | T1 | 30K | BK | 00 Not required | Adaptor Bracket |
| FLA60 | FLB80 | FLC120 | | T2 | 40K | GR | 01 Photocell | 3/5/7-pin NEMA Receptacle |
| FLA90 | FLB120 | FLC160 | | T3 | 50K | BZ | 02 Motion Sensor | 20KA Surge Protection Device |
| FLA120 | FLB160 | FLC200 | | T4 | 57K | WH | 03 Photocell + Motion Sensor | Safety Cable |
| FLA150 | FLB200 | FLC240 | | T5 | | | 04 DALI | |
| FLA180 | FLB240 | FLC280 | | | | | 05 1-10V dimming | |
| FLA210 | FLB280 | FLC320 | | | | | | |
| FLA240 | FLB320 | | | | | | | |
| FLA270 | | | | | | | | |
| FLA300 | | | | | | | | |

ZUMA LIGHTING LLC

325 N LARCHMONT BLVD STE 406, LOS ANGELES, CA 90004

INFO@ZUMALIGHTING.COM • (310) 975-3126 • ZUMALIGHTING.COM

Housing

The fixture housing is fabricated from die cast aluminum components.

Features & Benefits

- Modular design allows for easy installation, replacement, and maintenance.
- Available as pole mounted or wall mounted fixture.
- Multiple lighting control options are available

Finish

Thermoset polyester oven-baked powder coat, in any standard color. Custom colors are available to your specification.

Options

- Backlight Shield
- Button Style Photocell
- Motion Sensor
- Twist Lock Photocell

Certificates & Warranty

- DLC and ETL Listed
- Suitable for wet locations
- 5-year warranty

Electrical Components


Available in Types I through V. The FLA allows for 30w increments while achieving 120 lm/w efficacy. The FLB and FLC allow for 40w increments while achieving 160 lm/w efficacy.

Technical Parameters

| | |
|-----------------------|--|
| Power | 30-320W |
| Input | 120-277VAC or 220-240VAC or 347-480VAC |
| PF | >0.95 |
| THD | <20% |
| L70 | >200,000H |
| Operating Temperature | -40°C ~ +50°C |
| Efficacy | 120-160lm/W |
| ANSI CCT | 3000K/4000K/5000K/5700K |
| Min CRI | 70* or 80 or 85 |
| IP Rating | IP65 |
| SPD | Optional |
| DALI | Optional |
| 1-10V | Optional |
| Photocell | / |
| Smart Control | / |
| Optic (IESNA) | Type I, Type II, Type III, Type IV, Type V |
| Color Options | Black/Grey/Bronze/White |

* Standard

Dimensions

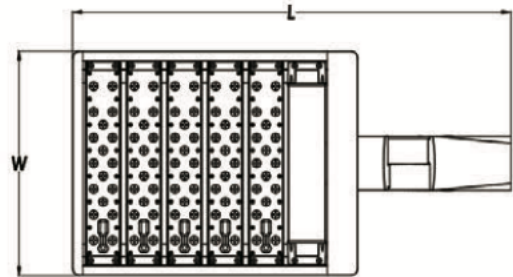

W = 13"
L = 25.4"*

**Fixture length varies depending on model, wattage, and mounting style.*

FLA150-L shown above. Contact factory for specific dimensions of each model.

ZUMA LIGHTING LLC

325 N LARCHMONT BLVD STE 406, LOS ANGELES, CA 90004
INFO@ZUMALIGHTING.COM • (310) 975-3126 • ZUMALIGHTING.COM