



**ZUMALIGHTING**  
QUALITY OUTDOOR SOLUTIONS



MODEL

**Grand Slam Pole / Fastball Fixture**

TYPE

**LED**

SERIES

**CUSTOM**


**ZUMA LIGHTING LLC**

325 N LARCHMONT BLVD STE 406, LOS ANGELES, CA 90004

[INFO@ZUMALIGHTING.COM](mailto:INFO@ZUMALIGHTING.COM) • (310) 975-3126 • [ZUMALIGHTING.COM](http://ZUMALIGHTING.COM)

# ORDERING INFORMATION

<b>Model</b> Grand Slam / Fastball
<b>Type</b> LED
<b>Series</b> CUSTOM

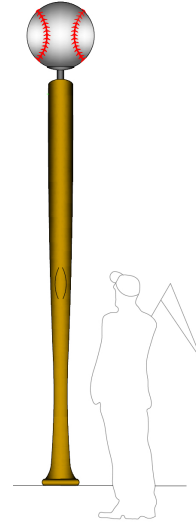

FIXTURE	SIZE	SOURCE	VOLTS	LAMP / TEMP	COLOR	LENS	OPTIONS
GS = Grand Slam Pole  FB = Fastball Post Top (LED)  GS-FB = Grand Slam Pole & Fastball Post Top Combo	12 = 12' Height  CH = Custom height, consult factory	10W 20W 30W 36W 40W 50W 60W 70W 80W 90W	U = 120v-277v  8 = 480v	3K = 3000K  35K = 3500K  4K = 4000K  5K = 5000K	DB = Dark Bronze  BK = Black  WH = White  SL = Silver  WG1 = Woodgrain  WG2 = Woodgrain  WG3 = Woodgrain  CWG = Custom woodgrain finish (consult factory)	OA = DR Opal Acrylic  WFA = White Frosted Acrylic	SP = Surge Protection  D = 0-10V Dimming Driver  CLED = Color changing LED  TL = Team Logo (consult factory for details)

# SPECIFICATIONS

## Construction

The Fastball is available as a standalone post-top LED fixture that can be mounted on any Zuma Lighting pole as well as already existing poles on the project location. The Fastball is also available as a combination unit with the Grand Slam pole. The LED illuminated globe has a 20" diameter and is constructed from DR opal acrylic.

The Grand Slam pole is also available separately or combined with any Zuma Lighting post-top fixture. The pole shaft is cast from heavy-duty corrosion resistant aluminum and includes a handhole and cover. Includes stainless steel hardware. Standard height of the pole is 10'. Custom sizing is available upon request.

## LED

UNIVERSAL LED, UL listed LED modules and drivers, combined with a vertical heat sink and into one configurable unit which gives precise light distribution in either a type III or V pattern. It allows us to offer lumen adjustment on light output. These are 10CHIP, 500 LUMEN, 525 mA, 6v. 3.2watt per module, achieving 159 lumens per watt efficacy, 82CRI at 4000K. Beside maximizing heat dissipation surface, we also utilize convection-based heat management which creates additional air flow around the strips. Unlike a big metal heat sink where the temperature for the chips in the middle is higher than the rest, the heat of each of our modules gets dissipated evenly. This innovative heat dissipation design keeps the junction temperature low and ultimately prolongs the life of the LED strips. Our modules are covered by our standard 5-year warranty and are available in many of our fixture's designs. The drivers are dimmable 0-10v.

## Certificates & Warranty

- ETL Verified
- Suitable for Wet Locations
- 5-Year Warranty

## Team Logo / Custom Branding

Optional features include custom branding on either/ both the "bat" pole shaft or the "ball" globe. Consult factory for details.

The pole branding is printed on the handhole cover. The globe branding is screen printed on the lens.


## Finish

Thermoset polyester oven-baked powder coat, in any standard color. Custom colors are available to your specification.


This pole is also available in a variety of our woodgrain finishes, shown below. Additional woodgrain finishes are available upon request.



WG1



WG2



WG3

