



**ZUMALIGHTING**  
QUALITY OUTDOOR SOLUTIONS



MODEL  
**SAN CLEMENTE**

TYPE  
**LED**

SERIES  
**HISTORICAL**

**ZUMA LIGHTING LLC**  
325 N LARCHMONT BLVD STE 406, LOS ANGELES, CA 90004  
[INFO@ZUMALIGHTING.COM](mailto:INFO@ZUMALIGHTING.COM) • (310) 975-3126 • [ZUMALIGHTING.COM](http://ZUMALIGHTING.COM)

# ORDERING INFORMATION







**Model** SAN CLEMENTE

**Type** LED

**Series** HISTORICAL



*Above image shown with fixture mounted on arm.  
Other arm styles available, consult factory for more  
information.*

FIXTURE	SIZE	WATTAGE	VOLTS	COLOR TEMP	OPTICS	MOUNT	LENSE	COLOR	OPTIONS
SANC	10 = 24"h x 11"w	40W	U = 120v-277v	27K = 2700K	T3	I = post top	TL = Clear Textured Glass	DB = Dark Bronze	M = Motion Sensor
	20 = 30"h x 15"w	60W	8 = 480v	3K = 3000K	T5	A = 	CL = Clear Glass	BK = Black	PC = Photocell
	30 = 36"h x 19"w	80W		4K = 4000K		C = 			
		120W*		5K = 5000K	D = 	FL = Frosted Glass	WH = White	D = Dimming	
		<i>*Only Available in Size 30</i>			E = 	OP = Obscure Pebble Glass	SL = Silver		S = Surge Protection
					F = 		CC = Custom		
						G =  (wall mount)			

**ZUMA LIGHTING LLC**

325 N LARCHMONT BLVD STE 406, LOS ANGELES, CA 90004

[INFO@ZUMALIGHTING.COM](mailto:INFO@ZUMALIGHTING.COM) • (310) 975-3126 • [ZUMALIGHTING.COM](http://ZUMALIGHTING.COM)

# SPECIFICATIONS

## Housing

The fixture housing is fabricated from ultra-thick, heavy duty cast aluminum.

## Lens

Lens styles available in clear textured tempered glass, clear tempered glass, frosted tempered glass, and obscure pebbled glass.

## Electrical Components

EncapLED, a vertical tower-style LED module system, combines optics and heat sink into one configurable unit which give precise light distribution. Available in types III & V. It allows for either 40W, 60W, or 80W light output. The module achieves 110-130 lm/w efficacy with LUXEON LUMILEDS TX CHIPS. Beside maximizing heat dissipation surface, we also utilize convection-based heat management which creates additional air flow around each chip. Unlike a big metal heat sink where the temperature for the chips in the middle is higher than the rest, the heat of each EncapLED chip gets dissipated evenly. A better heat dissipation design keeps the junction temperature low and ultimately prolongs the life of the LED chips. Our modules are available in any of our fixture designs, as well as in a simple retro-fit kit form for existing fixtures.

## Finish

Thermoset polyester oven-baked powder coat, in any standard color. Custom colors are available to your specification.

## Certificates & Warranty


- DLC Listed
- ETL Verified
- Suitable for Wet Locations
- 5-Year Warranty

## Mounting

Fixture can be installed on arms or post-top. Cast aluminum mounting slip fits over the tenon on the pole for a quick, clean, and simple installation.

Consult factory for arm style options.

## Dimensions

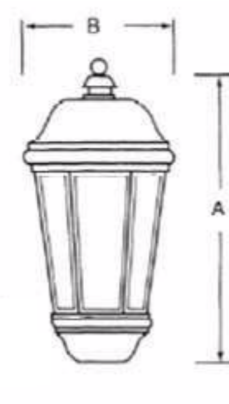

MODEL	A	B
SANT-10	24"	11"
SANT-20	30"	15"
SANT-30	36"	19"